


IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING APPLICATION UNDER RULE 53(b)

A

01/05/98



In accordance with 37 CFR 1.53(b), please file a
Continuation/☒ divisional
of the pending prior PATENT APPLICATION of:
Inventor: SCHNEIDER et al
Serial No. 08/740,653
Filed: October 31, 1996

Atty Dkt.: 1201-59
C# M#

Date: January 5, 1998
Group: 1211
Examiner: Hollinden

**LONG LASTING AQUEOUS DISPERSIONS OR SUSPENSIONS OF
PRESSURE-RESISTANT GAS-FILLED MICROVESICLES AND
METHODS FOR THE PREPARATION THEREOF**

Hon. Commissioner of Patents and Trademarks
Washington, DC 20231

Sir:

This request for filing under Rule 53(b) is made by the following named inventor(s) (using the above-identified title):
Inventor(s): SCHNEIDER et al

- ☒ Attached is a true copy of the prior application as originally filed including the specification, claims, Oath/Declaration and drawings (if any) and abstract (if any). No amendments (if any) referenced in the Oath or Declaration filed to complete the prior application introduced new matter.
- ☒ Priority is hereby claimed under 35 USC 119 based on the following foreign applications:

Application Number	Country	Day/Month/Year/Filed
92810046.0	Europe	January 23, 1992
<input type="checkbox"/> certified copy(ies) of foreign application(s) attached or		
<input checked="" type="checkbox"/> already filed on March 17, 1993 in prior appln. no. 07/991,233 filed December 16, 1992		
<input type="checkbox"/> already filed in filed		

Please amend the specification by inserting before the first line: -- This application claims the benefit of U.S.

Provisional Application No. , filed --

- ☒ The prior application is assigned to Bracco International B.V..
- ☒ Power of Attorney has been granted to Arthur R. Crawford et al, Reg. No. 25,327 of Nixon & Vanderhye P.C., 1100 North Glebe Road, 8th Floor, Arlington, Virginia 22201.
- ☒ Address all future communications to: Nixon & Vanderhye P.C., 1100 North Glebe Road, 8th Floor, Arlington, Virginia 22201.
- ☒ Please amend the specification by inserting before the first line --This is a divisional of application Serial No. 08/740,653, filed October 31, 1996, now pending which is a Division of 08/380,588 filed January 30, 1995, now 5,578,292 which is a division of 07/991,233 filed December 16, 1992, now 5,365,486.--
- ☐ Petition filed in prior application to extend its life to insure copendency.
- ☒ The Examiner's attention is directed to the prior art cited in the parent application by applicant and/or Examiner for the reasons stated therein.
- ☒ Please enter the attached and/or below preliminary amendment prior to calculation of filing fee:
- Cancel claims 2-18**
- ☒ The entire disclosure of the prior application above-referenced is considered as being part of the disclosure of this new application and is hereby incorporated by reference therein.

FILING FEE IS BASED ON CLAIMS AS FILED LESS ANY HEREWITH CANCELED

Basic Filing Fee.....	\$	790.00
- Total effective claims 31 - 20 (at least 20) = 11 x \$ 22.00.....	\$	242.00
Independent claims 1 - 3 (at least 3) = 0 x \$ 82.00.....	\$	0.00
If any proper multiple dependent claims now added for first time, add \$270.00 (ignore improper).....	\$	0.00
	SUBTOTAL	\$ 1,032.00
Assignment Recording Fee (\$40.00).....	\$	0.00
	TOTAL FEE ENCLOSED	\$ 1032.00

Any future submission requiring an extension of time is hereby stated to include a petition for such time extension.
The Commissioner is hereby authorized to charge any deficiency in the fee(s) filed, or asserted to be filed, or which should have been filed herewith (or with any paper hereafter filed in this application by this firm) to our **Account No. 14-1140**. A duplicate copy of this sheet is attached.

1100 North Glebe Road, 8th Floor
Arlington, Virginia 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100
ARC:pfc

NIXON & VANDERHYE P.C.
By Atty: Arthur R. Crawford, Reg. No. 25,327

Signature:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

SCHNEIDER et al

Atty. Ref.: 1201-59

Serial No. to be assigned

Group: 1211

Filed: **January 5, 1998**

Examiner: Hollinden

For: **LONG LASTING AQUEOUS
DISPERSIONS OR SUSPENSIONS OF
PRESSURE-RESISTANT GAS-FILLED
MICROVESICLES AND METHODS
FOR THE PREPARATION THEREOF**

* * * * *

January 5, 1998

Honorable Commissioner of Patents
and Trademarks
Washington, DC 20231

Sir:

PRELIMINARY AMENDMENT

Please amend the above-identified application as follows:

IN THE SPECIFICATION:

Page 1, before line 1, delete the insert and replace it with the following:

--This application is a division of Serial No. 08/740,653 filed October 31, 1996, which is a division of Serial No. 08/380,588 filed January 30, 1995, now U.S. 5,578,191 which is a division of application Serial No.

07/991,237 filed December 16, 1992 now U.S. 5,413,774. This application is a continuation-in-part of application Serial No. 08/288,550 filed August 10, 1994 which is a division of application Serial No. 08/033,435 filed March 18, 1993, abandoned, which is a continuation of Serial No. 07/695,243 filed May 3, 1991, abandoned.--

IN THE CLAIMS

Cancel claims 1-18 and add the following new claims:

--19. A method of ultrasonic imaging comprising administering to a subject a composition comprising, as a suspension in an aqueous liquid carrier phase, microvesicles filled with a gas mixture, in which at least one gas is a physiologically acceptable halogenated gas whose ratio of solubility in water, expressed in liters of gas by liter of water under standard conditions, to square root of the molecular weight, in daltons, is below 0.0027; and ultrasonically imaging at least a portion of said subject.

20. The method of claim 19, wherein the halogenated gas is a freon.

21. The method of claim 20, wherein the freon is CF_4 .

22. The method of claim 20, wherein the freon is CBrF_3 .

23. The method of claim 20, wherein the freon is CClF_3 .
24. The method of claim 20, wherein the freon is CCl_2F_2 .
25. The method of claim 20, wherein the freon is C_2ClF_5 .
26. The method of claim 20, wherein the freon is CBrClF_2 .
27. The method of claim 20, wherein the freon is $\text{C}_2\text{Cl}_2\text{F}_4$.
28. The method of claim 20, wherein the freon is C_2F_6 .
29. The method of claim 20, wherein the freon is C_4F_8 .
30. The method of claim 20, wherein the freon is C_4F_{10} .
31. The method of claim 19, wherein the halogenated gas is SeF_6 .
32. The method of claim 19 wherein the halogenated gas is SF_6 .
33. The method of claims 19, wherein the gas mixture contains
nitrogen.
34. The method of claims 19, wherein the gas mixture contains
carbon dioxide.
35. The method of claims 19, wherein the gas mixture contains air.
36. The method of claims 19, wherein the gas mixture contains
krypton.

37. The method of claims 19, wherein the gas mixture contains xenon.
38. The method of claims 19, wherein the gas mixture contains argon.
39. The method of claim 19 wherein the microvesicles are microbubbles bounded by a gas/liquid interfacial closed surface made from dissolved surfactants.
40. The method of claim 39, wherein the surfactants comprise lamellar or laminar phospholipids.
41. The method of claim 40, wherein at least part of the phospholipids are in the form of liposomes.
42. The method of claim 41, wherein the liquid carrier phase further contains stabilizers.
43. The method of claim 40, wherein at least one of the phospholipids is a diacylphosphatidyl compound wherein the acyl group is a C₁₆ fatty acid residue or a higher homologue thereof.

44. A method according to claim 19 wherein said microvesicles are microbubbles bounded by a gas/liquid interface made from dissolved phospholipids

45. The method of claim 19, wherein the microvesicles are microballoons bounded by a material envelope made of an organic polymeric membrane.

46. The method of claim 45, wherein the polymers of the membrane are selected from polylactic or polyglycolic acid and their copolymers, heat denaturable serum albumin, heat denaturable hemoglobin, polystyrene, and esters of polyglutamic and polyaspartic acids.

47. The method of claim 46, wherein the microvesicles are made from heat denaturable serum albumin and filled with SF₆.

48. The method of claim 46, wherein the microvesicles are made from heat denaturable serum albumin and filled with CF₄.

49. The method of claim 46, wherein the microvesicles are made from heat denaturable serum albumin and filled with CBrF₃.

SCHNEIDER et al
Serial No. to be assigned


REMARKS

The above claims are directed to subject matter disclosed but not presently claimed in copending applications 08/740,653 and 08/832,950 both pending in Art Unit 1211.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: _____

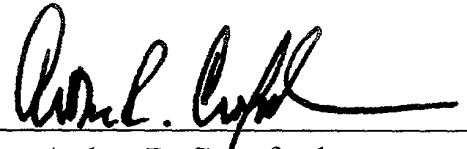

Arthur R. Crawford

Reg. No. 25,327

ARC:pfc
1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

U.S. PATENT APPLICATION

Inventor(s): Michel SCHNEIDER
Feng YAN
Pascal GRENIER
Jerome PUGINIER
Marie-Bernadette BARRAU

Invention: LONG-LASTING AQUEOUS DISPERSIONS OR
SUSPENSIONS OF PRESSURE-RESISTANT GAS-FILLED
MICROVESICLES AND METHODS FOR THE PREPARATION
THEREOF

NIXON & VANDERHYE P.C.
ATTORNEYS AT LAW
1100 NORTH GLEBE ROAD
8TH FLOOR
ARLINGTON, VIRGINIA 22201-4714
(703) 816-4000
Telex 200797 NIXN UR
Telecopier (703) 816-4100

SPECIFICATION

LONG-LASTING AQUEOUS DISPERSIONS OR SUSPENSIONS OF PRESSURE-RESISTANT GAS-FILLED MICROVESICLES AND METHODS FOR THE PREPARATION THEREOF

Technical Field

The present invention concerns stable dispersions or compositions of gas filled microvesicles in aqueous carrier liquids. These dispersions are generally usable for most kinds of applications requiring gases homogeneously dispersed in liquids. One notable application for such dispersions is to be injected into living beings, for instance for ultrasonic echography and other medical applications. The invention also concerns the methods for making the foregoing compositions including some materials involved in the preparations, for instance pressure-resistant gas-filled microbubbles, microcapsules and microballoons.

Background of Invention

It is well known that microbodies or microglobules of air or gas (defined here as microvesicles), e.g. microbubbles or microballoons, suspended in a liquid are exceptionally efficient ultrasound reflectors for echography. In this disclosure the term of "microbubble" specifically designates hollow spheres or globules, filled with air or a gas, in suspension in a liquid which generally result from the introduction therein of air or gas in divided form, the liquid preferably also containing surfactants or tensides to control the surface properties and the stability of the bubbles. The term of "microcapsule" or "microballoon" designates preferably air or gas-filled bodies with a material boundary or envelope, i.e. a polymer membrane wall. Both microbubbles and microballoons are useful as ultrasonic contrast agents. For instance injecting into the bloodstream of living bodies suspensions of air-filled microbubbles or microballoons (in the range of 0.5 to 10 μm) in a carrier liquid will strongly reinforce ultrasonic echography imaging, thus aiding in the visualization of internal organs. Imaging of vessels and internal organs can strongly help in medical diagnosis, for instance for the detection of cardiovascular and other diseases.

The formation of suspensions of microbubbles in an injectable liquid carrier suitable for echography can be produced by the release of a gas dissolved under pressure in this liquid, or by a chemical reaction generating gaseous products, or by admixing with the liquid soluble or insoluble solids containing air or gas trapped or adsorbed therein.

For instance, in US-A-4,446,442 (Schering), there are disclosed a series of different techniques for producing suspensions of gas microbubbles in a sterilized injectable liquid carrier using (a) a solution of a tenside (surfactant) in a carrier liquid (aqueous) and (b) a solution of a viscosity enhancer as stabilizer. For generating the bubbles, the techniques disclosed there include forcing at high velocity a mixture of (a), (b) and air through a small aperture; or injecting (a) into (b) shortly before use together with a physiologically acceptable gas; or adding an acid to (a) and a carbonate to (b), both components being mixed together just before use and the acid reacting with the carbonate to generate CO₂ bubbles; or adding an over-pressurized gas to a mixture of (a) and (b) under storage, said gas being released into microbubbles at the time when the mixture is used for injection.

EP-A-131,540 (Schering) discloses the preparation of microbubble suspensions in which a stabilized injectable carrier liquid, e.g. a physiological aqueous solution of salt, or a solution of a sugar like maltose, dextrose, lactose or galactose, is mixed with solid microparticles (in the 0.1 to 1 μm range) of the same sugars containing entrapped air. In order to develop the suspension of bubbles in the liquid carrier, both liquid and solid components are agitated together under sterile conditions for a few seconds and, once made, the suspension must then be used immediately, i.e. it should be injected within 5-10 minutes for echographic measurements; indeed, because they are evanescent, the bubble concentration becomes too low for being practical after that period.

In an attempt to cure the evanescence problem, microballoons, i.e. microvesicles with a material wall, have been developed. As said before, while the microbubbles only have an immaterial or evanescent envelope, i.e. they are only surrounded by a wall of liquid whose surface tension is being modified by the presence of a surfactant, the microballoons or microcapsules have a tangible envelope made of

substantive material, e.g. a polymeric membrane with definite mechanical strength. In other terms, they are microvesicles of material in which the air or gas is more or less tightly encapsulated.

For instance, US-A-4,276,885 (Tickner et al.) discloses using surface membrane microcapsules containing a gas for enhancing ultrasonic images, the membrane including a multiplicity of non-toxic and non-antigenic organic molecules. In a disclosed embodiment, these microbubbles have a gelatine membrane which resists coalescence and their preferred size is 5-10 μm . The membrane of these microbubbles is said to be sufficiently stable for making echographic measurements.

Air-filled microballoons without gelatin are disclosed in US-A-4,718,433 (Feinstein). These microvesicles are made by sonication (5 to 30 kHz) of protein solutions like 5% serum albumin and have diameters in the 2-20 μm range, mainly 2-4 μm . The microvesicles are stabilized by denaturation of the membrane forming protein after sonication, for instance by using heat or by chemical means, e.g. by reaction with formaldehyde or glutaraldehyde. The concentration of stable microvesicles obtained by this technique is said to be about $8 \times 10^6/\text{ml}$ in the 2-4 μm range, about $10^6/\text{ml}$ in the 4-5 μm range and less than 5×10^5 in the 5-6 μm range. The stability time of these microvesicles is said to be 48 hrs or longer and they permit convenient left heart imaging after intravenous injection. For instance, the sonicated albumin microbubbles when injected into a peripheral vein are capable of transpulmonary passage. This results in echocardiographic opacification of the left ventricle cavity as well as myocardial tissues.

Recently, still further improved microballoons for injection ultrasonic echography have been reported in EP-A-324,938 (Widder). In this document there are disclosed high concentrations (more than $10^8/\text{ml}$) of air-filled protein-bounded microvesicles of less than 10 μm which have life-times of several months or more. Aqueous suspensions of these microballoons are produced by ultrasonic cavitation of solutions of heat denaturable proteins, e.g. human serum albumin, which operation also leads to a degree of foaming of the membrane-forming protein and its subsequent hardening by heat. Other proteins such as hemoglobin and collagen were also said to be convenient in this process. The high storage stability of the suspensions of microballoons

disclosed in EP-A-324.938 enables them to be marketed as such, i.e. with the liquid carrier phase, which is a strong commercial asset since preparation before use is no longer necessary.

Similar advantages have been recently discovered in connection with the preparation of aqueous microbubble suspensions, i.e. there has been discovered storage-stable dry pulverulent composition which will generate long-lasting bubble suspensions upon the addition of water. This is being disclosed in Application PCT/EP 91/00620 where liposomes comprising membrane-forming lipids are freeze-dried, and the freeze-dried lipids, after exposure to air or a gas for a period of time, will produce long-lasting bubble suspensions upon simple addition thereto of an aqueous liquid carrier.

Despite the many progresses achieved regarding the stability under storage of aqueous microbubble suspensions, this being either in the precursor or final preparation stage, there still remained until now the problem of vesicle durability when the suspensions are exposed to overpressure, e.g. pressure variations such as that occurring after injection in the blood stream of a patient and consecutive to heart pulses, particularly in the left ventricle. Actually, the present inventors have observed that, for instance in anaesthetised rabbits, the pressure variations are not sufficient to substantially alter the bubble count for a period of time after injection. In contrast, in dogs and human patients, typical microbubbles or microballoons filled with common gases such as air, methane or CO₂ will collapse completely in a matter of seconds after injection due to the blood pressure effect. This observation has been confirmed by others: For instance, S. GOTTLIEB et al. in J. Am. Soc. of Echocardiography 3 (1990) 238 have reported that cross-linked albumin microballoons prepared by the sonication method were losing all echogenic properties after being subjected to an overpressure of 60 Torr. It became hence important to solve the problem and to increase the useful life of suspensions of microbubbles and membrane bounded microballoons under pressure in order to ensure that echographic measurements can be performed in vivo safely and reproducibly.

It should be mentioned at this stage that another category of echogenic image enhancing agents has been proposed which resist overpressures as they consist of plain microspheres with a porous

structure, such porosity containing air or a gas. Such microspheres are disclosed for instance in WO-A-91/12823 (DELTA BIOTECHNOLOGY), EP-A-327 490 (SCHERING) and EP-A-458 079 (HOECHST). The drawback with the plain porous microspheres is that the encapsulated gas-filled free space is generally too small for good echogenic response and the spheres lack adequate elasticity. Hence the preference generally remains with the hollow microvesicles and a solution to the collapsing problem was searched.

Disclosure of the Invention

This problem has now been solved by using gases or gas mixtures in conformity with the criteria outlined in the claims. Briefly, it has been found that when the echogenic microvesicles are made in the presence of a gas, respectively are filled at least in part with a gas, having physical properties in conformity with the equation below, then the microvesicles remarkably resist pressure >60 Torr after injection for a time sufficient to obtain reproducible echographic measurements:

$$\frac{s_{\text{gas}} \sqrt{M_{\text{wair}}}}{s_{\text{air}} \sqrt{M_{\text{wgas}}}} \leq 1$$

In the foregoing equation, "s" designates the solubilities in water expressed as the "BUNSEN" coefficients, i.e. as volume of gas dissolved by unit volume of water under standard conditions (1 bar, 25°C), and under partial pressure of the given gas of 1 atm (see the Gas Encyclopaedia, Elsevier 1976). Since, under such conditions and definitions, the solubility of air is .0167, and the square root of its average molecular weight (Mw) is 5.39, the above relation simplifies to:

$$s_{\text{gas}} / \sqrt{M_{\text{wgas}}} \leq .0031$$

In the Examples to be found hereafter there is disclosed the testing of echogenic microbubbles and microballoons (see the Tables) filled with a number of different gases and mixtures thereof, and the corresponding resistance thereof to pressure increases, both in vivo and in vitro. In the Tables, the water solubility factors have also been taken

from the aforecited Gas Encyclopaedia from "L'Air Liquide", Elsevier Publisher (1976).

The microvesicles in aqueous suspension containing gases according to the invention include most microbubbles and microballoons disclosed until now for use as contrast agents for echography. The preferred microballoons are those disclosed in EP-A-324.938, PCT/EP91/01706 and EP-A-458 745; the preferred microbubbles are those of PCT/EP91/00620; these microbubbles are advantageously formed from an aqueous liquid and a dry powder (microvesicle precursors) containing lamellarized freeze-dried phospholipids and stabilizers; the microbubbles are developed by agitation of this powder in admixture with the aqueous liquid carrier. The microballoons of EP-A-458 745 have a resilient interfacially precipitated polymer membrane of controlled porosity. They are generally obtained from emulsions into microdroplets of polymer solutions in aqueous liquids, the polymer being subsequently caused to precipitate from its solution to form a filmogenic membrane at the droplet/liquid interface, which process leads to the initial formation of liquid-filled microvesicles, the liquid core thereof being eventually substituted by a gas.

In order to carry out the method of the present invention, i.e. to form or fill the microvesicles, whose suspensions in aqueous carriers constitute the desired echogenic additives, with the gases according to the foregoing relation, one can either use, as a first embodiment, a two step route consisting of (1) making the microvesicles from appropriate starting materials by any suitable conventional technique in the presence of any suitable gas, and (2) replacing this gas originally used (first gas) for preparing the microvesicles with a new gas (second gas) according to the invention (gas exchange technique).

Otherwise, according to a second embodiment, one can directly prepare the desired suspensions by suitable usual methods under an atmosphere of the new gas according to the invention.

If one uses the two-step route, the initial gas can be first removed from the vesicles (for instance by evacuation under suction) and thereafter replaced by bringing the second gas into contact with the

evacuated product, or alternatively, the vesicles still containing the first gas can be contacted with the second gas under conditions where the second gas will displace the first gas from the vesicles (gas substitution). For instance, the vesicle suspensions, or preferably precursors thereof (precursors here may mean the materials the microvesicle envelopes are made of, or the materials which, upon agitation with an aqueous carrier liquid, will generate or develop the formation of microbubbles in this liquid), can be exposed to reduced pressure to evacuate the gas to be removed and then the ambient pressure is restored with the desired gas for substitution. This step can be repeated once or more times to ensure complete replacement of the original gas by the new one. This embodiment applies particularly well to precursor preparations stored dry, e.g. dry powders which will regenerate or develop the bubbles of the echogenic additive upon admixing with an amount of carrier liquid. Hence, in one preferred case where microbubbles are to be formed from an aqueous phase and dry laminarized phospholipids, e.g. powders of dehydrated lyophilized liposomes plus stabilizers, which powders are to be subsequently dispersed under agitation in a liquid aqueous carrier phase, it is advantageous to store this dry powder under an atmosphere of a gas selected according to the invention. A preparation of such kind will keep indefinitely in this state and can be used at any time for diagnosis, provided it is dispersed into sterile water before injection.

Otherwise, and this is particularly so when the gas exchange is applied to a suspension of microvesicles in a liquid carrier phase, the latter is flushed with the second gas until the replacement (partial or complete) is sufficient for the desired purpose. Flushing can be effected by bubbling from a gas pipe or, in some cases, by simply sweeping the surface of the liquid containing the vesicles under gentle agitation with a stream (continuous or discontinuous) of the new gas. In this case, the replacement gas can be added only once in the flask containing the suspension and allowed to stand as such for a while, or it can be renewed one or more times in order to assure that the degree of renewal (gas exchange) is more or less complete.

Alternatively, in a second embodiment as said before, one will effect the full preparation of the suspension of the echogenic additives starting with the usual precursors thereof (starting materials), as recited in the prior art and operating according to usual means of said

prior art, but in the presence of the desired gases or mixture of gases according to the invention instead of that of the prior art which usually recites gases such as air, nitrogen, CO₂ and the like.

It should be noted that in general the preparation mode involving one first type of gas for preparing the microvesicles and, thereafter, substituting the original gas by a second kind of gas, the latter being intended to confer different echogenic properties to said microvesicles, has the following advantage: As will be best seen from the results in the Examples hereinafter, the nature of the gas used for making the microvesicles, particularly the microballoons with a polymer envelope, has a definitive influence on the overall size (i.e. the average mean diameter) of said microvesicles; for instance, the size of microballoons prepared under air with precisely set conditions can be accurately controlled to fall within a desired range, e.g. the 1 to 10 μm range suitable for echographing the left and right heart ventricles. This not so easy with other gases, particularly the gases in conformity with the requirements of the present invention; hence, when one wishes to obtain microvesicles in a given size range but filled with gases the nature of which would render the direct preparation impossible or very hard, one will much advantageously rely on the two-steps preparation route, i.e. one will first prepare the microvesicles with a gas allowing more accurate diameter and count control, and thereafter replace the first gas by a second gas by gas exchange.

In the description of the Experimental part that follows (Examples), gas-filled microvesicles suspended in water or other aqueous solutions have been subjected to pressures over that of ambient. It was noted that when the overpressure reached a certain value (which is generally typical for a set of microsphere parameters and working conditions like temperature, compression rate, nature of carrier liquid and its content of dissolved gas (the relative importance of this parameter will be detailed hereinafter), nature of gas filler, type of echogenic material, etc.), the microvesicles started to collapse, the bubble count progressively decreasing with further increasing the pressure until a complete disappearance of the sound reflector effect occurred. This phenomenon was better followed optically, (nephelometric measurements) since it is paralleled by a corresponding change in optical density, i.e. the transparency of the medium increases

as the bubble progressively collapse. For this, the aqueous suspension of microvesicles (or an appropriate dilution thereof) was placed in a spectrophotometric cell maintained at 25° C (standard conditions) and the absorbance was measured continuously at 600 or 700 nm, while a positive hydrostatic overpressure was applied and gradually increased. The pressure was generated by means of a peristaltic pump (GILSON's Mini-puls) feeding a variable height liquid column connected to the spectrophotometric cell, the latter being sealed leak-proof. The pressure was measured with a mercury manometer calibrated in Torr. The compression rate with time was found to be linearly correlated with the pump's speed (rpm's). The absorbance in the foregoing range was found to be proportional to the microvesicle concentration in the carrier liquid.

Figure 1 is a graph which relates the bubble concentration (bubble count), expressed in terms of optical density in the aforementioned range, and the pressure applied over the bubble suspension. The data for preparing the graph are taken from the experiments reported in Example 4.

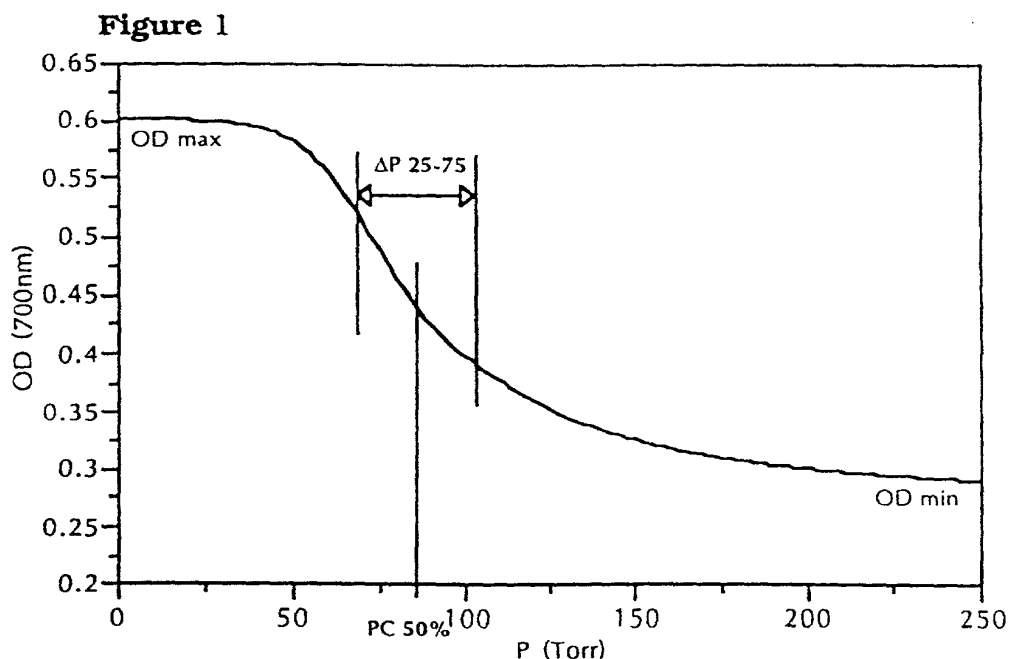


Figure 1 shows graphically that the change of absorbance versus pressure is represented by a sigmoid-shaped curve. Up to a certain pressure value, the curve is nearly flat which indicates that the bubbles

are stable. Then, a relatively fast absorbance drop occurs, which indicates the existence of a relatively narrow critical region within which any pressure increase has a rather dramatic effect on the bubble count. When all the microvesicles have disappeared, the curve levels off again. A critical point on this curve was selected in the middle between the higher and lower optical readings, i.e. intermediate between the "full"-bubble (OD max) and the "no"-bubble (OD min) measurements, this actually corresponding where about 50% of the bubbles initially present have disappeared, i.e. where the optical density reading is about half the initial reading, this being set, in the graph, relative to the height at which the transparency of the pressurized suspension is maximal (base line). This point which is also in the vicinity where the slope of the curve is maximal is defined as the critical pressure PC. It was found that for a given gas, PC does not only depend on the aforementioned parameters but also, and particularly so, on the actual concentration of gas (or gases) already dissolved in the carrier liquid: the higher the gas concentration, the higher the critical pressure. In this connection, one can therefore increase the resistance to collapse under pressure of the microvesicles by making the carrier phase saturated with a soluble gas, the latter being the same, or not, (i.e. a different gas) as the one that fills the vesicles. As an example, air-filled microvesicles could be made very resistant to overpressures (>120 Torr) by using, as a carrier liquid, a saturated solution of CO₂. Unfortunately, this finding is of limited value in the diagnostic field since once the contrast agent is injected to the bloodstream of patients (the gas content of which is of course outside control), it becomes diluted therein to such an extent that the effect of the gas originally dissolved in the injected sample becomes negligible.

Another readily accessible parameter to reproducibly compare the performance of various gases as microsphere fillers is the width of the pressure interval (ΔP) limited by the pressure values under which the bubble counts (as expressed by the optical densities) is equal to the 75% and 25% of the original bubble count. Now, it has been surprisingly found that for gases where the pressure difference $DP = P_{25} - P_{75}$ exceeds a value of about 25 - 30 Torr, the killing effect of the blood pressure on the gas-filled microvesicles is minimized, i.e. the actual decrease in the bubble count is sufficiently slow not to impair the significance, accuracy and reproducibility of echographic measurements.

It was found, in addition, that the values of PC and ΔP also depend on the rate of rising the pressure in the test experiments illustrated by Fig. 1, i.e. in a certain interval of pressure increase rates (e.g. in the range of several tens to several hundreds of Torr/min), the higher the rate, the larger the values for PC and ΔP . For this reason, the comparisons effected under standard temperature conditions were also carried out at the constant increase rate of 100 Torr/min. It should however be noted that this effect of the pressure increase rate on the measure of the PC and ΔP values levels off for very high rates; for instance the values measured under rates of several hundreds of Torr/min are not significantly different from those measured under conditions ruled by heart beats.

Although the very reasons why certain gases obey the aforementioned properties, while others do not, have not been entirely clarified, it would appear that some relation possibly exists in which, in addition to molecular weight and water solubility, dissolution kinetics, and perhaps other parameters, are involved. However these parameters need not be known to practise the present invention since gas eligibility can be easily determined according to the aforesaid criteria.

The gaseous species which particularly suit the invention are, for instance, halogenated hydrocarbons like the freons and stable fluorinated chalcogenides like SF_6 , SeF_6 and the like.

It has been mentioned above that the degree of gas saturation of the liquid used as carrier for the microvesicles according to the invention has an importance on the vesicle stability under pressure variations. Indeed, when the carrier liquid in which the microvesicles are dispersed for making the echogenic suspensions of the invention is saturated at equilibrium with a gas, preferably the same gas with which the microvesicles are filled, the resistance of the microvesicles to collapse under variations of pressure is markedly increased. Thus, when the product to be used as a contrast agent is sold dry to be mixed just before use with the carrier liquid (see for instance the products disclosed in PCT/EP91/00620 mentioned hereinbefore), it is quite advantageous to use, for the dispersion, a gas saturated aqueous carrier. Alternatively, when marketing ready-to-use microvesicle suspensions as

contrast agents for echography, one will advantageously use as the carrier liquid for the preparation a gas saturated aqueous solution; in this case the storage life of the suspension will be considerably increased and the product may be kept substantially unchanged (no substantial bubble count variation) for extended periods, for instance several weeks to several months, and even over a year in special cases. Saturation of the liquid with a gas may be effected most easily by simply bubbling the gas into the liquid for a period of time at room temperature.

Example 1

Albumin microvesicles filled with air or various gases were prepared as described in EP-A- 324 938 using a 10 ml calibrated syringe filled with a 5% human serum albumin (HSA) obtained from the Blood Transfusion Service, Red-Cross Organization, Bern, Switzerland. A sonicator probe (Sonifier Model 250 from Branson Ultrasonic Corp, USA) was lowered into the solution down to the 4 ml mark of the syringe and sonication was effected for 25 sec (energy setting = 8). Then the sonicator probe was raised above the solution level up to the 6 ml mark and sonication was resumed under the pulse mode (cycle = 0.3) for 40 sec. After standing overnight at 4°C, a top layer containing most of the microvesicles had formed by buoyancy and the bottom layer containing unused albumin debris of denatured protein and other insolubles was discarded. After resuspending the microvesicles in fresh albumin solution the mixture was allowed to settle again at room temperature and the upper layer was finally collected. When the foregoing sequences were carried out under the ambient atmosphere, air filled microballoons were obtained. For obtaining microballoons filled with other gases, the albumin solution was first purged with a new gas, then the foregoing operational sequences were effected under a stream of this gas flowing on the surface of the solution; then at the end of the operations, the suspension was placed in a glass bottle which was extensively purged with the desired gas before sealing.

The various suspensions of microballoons filled with different gases were diluted to 1:10 with distilled water saturated at equilibrium with air, then they were placed in an optical cell as described above and the absorbance was recorded while increasing steadily the pressure over the

suspension. During the measurements, the suspensions temperature was kept at 25°C.

The results are shown in the Table 1 below and are expressed in terms of the critical pressure PC values registered for a series of gases defined by names or formulae, the characteristic parameters of such gases, i.e. Mw and water solubility being given, as well as the original bubble count and bubble average size (mean diameter in volume).

TABLE 1

Sample	Gas	Mw	Solubility	Bubble count (10 ⁸ /ml)	Bubble size (μ m)	PC(Torr)	Sgas/ \sqrt Mw
AFre1	CF ₄	88	.0038	0.8	5.1	120	.0004
AFre2	CBrF ₃	149	.0045	0.1	11.1	104	.0004
ASF1	SF ₆	146	.005	13.9	6.2	150	.0004
ASF2	SF ₆	146	.005	2.0	7.9	140	.0004
AN1	N ₂	28	.0144	0.4	7.8	62	.0027
A14	Air	29	.0167	3.1	11.9	53	.0031
A18	Air	29	.0167	3.8	9.2	52	-
A19	Air	29	.0167	1.9	9.5	51	-
AMe1	CH ₄	16	.032	0.25	8.2	34	.008
AKr1	Kr	84	.059	0.02	9.2	86	.006
AX1	Xe	131	.108	0.06	17.2	65	.009
AX2	Xe	131	.108	0.03	16.5	89	.009

From the results of Table 1, it is seen that the critical pressure PC increases for gases of lower solubility and higher molecular weight. It can therefore be expected that microvesicles filled with such gases will provide more durable echogenic signals in vivo. It can also be seen that average bubble size generally increases with gas solubility.

Example 2

Aliquots (1 ml) of some of the microballoon suspensions prepared in Example 1 were injected in the jugular vein of experimental rabbits

in order to test echogenicity in vivo. Imaging of the left and right heart ventricles was carried out in the grey scale mode using an Acuson 128-XP5 echography apparatus and a 7.5 MHz transducer. The duration of contrast enhancement in the left ventricle was determined by recording the signal for a period of time. The results are gathered in Table 2 below which also shows the PC of the gases used.

TABLE 2

Sample (Gas)	Duration of contrast (sec)	PC (Torr)
AMe1 (CH ₄)	zero	34
A14 (air)	10	53
A18 (air)	11	52
AX1 (Xe)	20	65
AX2 (Xe)	30	89
ASF2(SF ₆)	>60	140

From the above results, one can see the existence of a definite correlation between the critical pressure of the gases tried and the persistence in time of the echogenic signal.

Example 3

A suspension of echogenic air-filled galactose microparticles (Echovist® from SCHERING AG) was obtained by shaking for 5 sec 3 g of the solid microparticles in 8.5 ml of a 20% galactose solution. In other preparations, the air above a portion of Echovist® particles was evacuated (0.2 Torr) and replaced by an SF₆ atmosphere, whereby, after addition of the 20% galactose solution, a suspension of microparticles containing associated sulfur hexafluoride was obtained. Aliquots (1 ml) of the suspensions were administered to experimental rabbits (by injection in the jugular vein) and imaging of the heart was effected as described in the previous example. In this case the echogenic microparticles do not transit through the lung capillaries, hence imaging is restricted to the right ventricle and the overall signal persistence has no particular significance. The results of Table 3 below show the value of signal peak intensity a few seconds after injection.

TABLE 3

Sample No	Gas	Signal peak (arbitrary units)
Gal1	air	114
Gal2	air	108
Gal3	SF ₆	131
Gal4	SF ₆	140

It can be seen that sulfur hexafluoride, an inert gas with low water solubility, provides echogenic suspensions which generate echogenic signals stronger than comparable suspensions filled with air. These results are particularly interesting in view of the teachings of EP-A-441 468 and 357 163 (SCHERING) which disclose the use for echography purposes of microparticles, respectively, cavitate and clathrate compounds filled with various gases including SF₆; these documents do not however report particular advantages of SF₆ over other more common gases with regard to the echogenic response.

Example 4

A series of echogenic suspensions of gas-filled microbubbles were prepared by the general method set forth below:

One gram of a mixture of hydrogenated soya lecithin (from Nattermann Phospholipids GmbH, Germany) and dicetyl-phosphate (DCP), in 9/1 molar ratio, was dissolved in 50 ml of chloroform, and the solution was placed in a 100 ml round flask and evaporated to dryness on a Rotavapor apparatus. Then, 20 ml of distilled water were added and the mixture was slowly agitated at 75°C for an hour. This resulted in the formation of a suspension of multilamellar liposomes (MLV) which was thereafter extruded at 75°C through, successively, 3 µm and 0.8 µm polycarbonate membranes (Nuclepore®). After cooling, 1 ml aliquots of the extruded suspension were diluted with 9 ml of a concentrated lactose solution (83 g/l), and the diluted suspensions were frozen at -45°C. The frozen samples were thereafter freeze-dried under high vacuum to a free-flowing powder in a vessel which was ultimately filled

with air or a gas taken from a selection of gases as indicated in Table 4 below. The powdery samples were then resuspended in 10 ml of water as the carrier liquid, this being effected under a stream of the same gas used to fill the said vessels. Suspension was effected by vigorously shaking for 1 min on a vortex mixer.

The various suspensions were diluted 1:20 with distilled water equilibrated beforehand with air at 25°C and the dilutions were then pressure tested at 25°C as disclosed in Example 1 by measuring the optical density in a spectrophotometric cell which was subjected to a progressively increasing hydrostatic pressure until all bubbles had collapsed. The results are collected in Table 4 below which, in addition to the critical pressure PC, gives also the ΔP values (see fig 1).

TABLE 4

Sample No	Gas	M _w	Solubility in H ₂ O	Bubble count (10 ⁸ /ml)	PC (Torr)	ΔP (Torr)
LFre1	CF ₄	88	.0038	1.2	97	35
LFre2	CBrF ₃	149	.0045	0.9	116	64
LSF1	SF ₆	146	.005	1.2	92	58
LFre3	C ₄ F ₈	200	.016	1.5	136	145
L1	air	29	.0167	15.5	68	17
L2	air	29	.0167	11.2	63	17
LAr1	Ar	40	.031	14.5	71	18
LKr1	Kr	84	.059	12.2	86	18
LXe1	Xe	131	.108	10.1	92	23
LFre4	CHClF ₂	86	.78	-	83	25

The foregoing results clearly indicate that the highest resistance to pressure increases is provided by the most water-insoluble gases. The behavior of the microbubbles is therefore similar to that of the microballoons in this regard. Also, the less water-soluble gases with the higher molecular weights provide the flattest bubble-collapse/pressure curves (i.e. ΔP is the widest) which is also an important factor of echogenic response durability in vivo, as indicated hereinbefore.

Example 5

Some of the microbubble suspensions of Example 4 were injected to the jugular vein of experimental rabbits as indicated in Example 2 and imaging of the left heart ventricle was effected as indicated previously. The duration of the period for which a useful echogenic signal was detected was recorded and the results are shown in Table 5 below in which C₄F₈ indicates octafluorocyclobutane.

TABLE 5

Sample No	Type of gas	Contrast duration (sec)
L1	Air	38
L2	Air	29
LMel	CH ₄	47
LKr1	Krypton	37
LFre1	CF ₄	>120
LFre2	CBrF ₃	92
LSF1	SF ₆	>112
LFre3	C ₄ F ₈	>120

These results indicate that, again in the case of microbubbles, the gases according to the criteria of the present invention will provide ultrasonic echo signal for a much longer period than most gases used until now.

Example 6

Suspensions of microbubbles were prepared using different gases exactly as described in Example 4, but replacing the lecithin phospholipid ingredient by a mole equivalent of diarachidoyl-phosphatidylcholine (C₂₀ fatty acid residue) available from Avanti Polar Lipids, Birmingham, Alabama, USA. The phospholipid to DCP molar ratio was still 9/1. Then the suspensions were pressure tested as in Example 4; the results, collected in Table 6A below, are to be compared with those of Table 4.

TABLE 6A

Sample No	Type of gas	Mw of gas	Solubility in water	Bubble count (10 ⁸ /ml)	PC (Torr)	ΔP (Torr)
LFre1	CF ₄	88	.0038	3.4	251	124
LFre2	CBrF ₃	149	.0045	0.7	121	74
LSF1	SF ₆	146	.005	3.1	347	>150
LFre3	C ₄ F ₈	200	.016	1.7	>350	>200
L1	Air	29	.0167	3.8	60	22
LBul	Butane	58	.027	0.4	64	26
LAr1	Argon	40	.031	3.3	84	47
LMe1	CH ₄	16	.032	3.0	51	19
LEt1	C ₂ H ₆	44	.034	1.4	61	26
LKr1	Kr	84	.059	2.7	63	18
LXe1	Xe	131	.108	1.4	60	28
LFre4	CHClF ₂	86	.78	0.4	58	28

The above results, compared to that of Table 4, show that, at least with low solubility gases, by lengthening the chain of the phospholipid fatty acid residues, one can dramatically increase the stability of the echogenic suspension toward pressure increases. This was further confirmed by repeating the foregoing experiments but replacing the phospholipid component by its higher homolog, i.e. di-behenoyl-phosphatidylcholine (C₂₂ fatty acid residue). In this case, the resistance to collapse with pressure of the microbubbles suspensions was still further increased.

Some of the microbubbles suspensions of this Example were tested in dogs as described previously for rabbits (imaging of the heart ventricles after injection of 5 ml samples in the anterior cephalic vein). A significant enhancement of the useful in-vivo echogenic response was noted, in comparison with the behavior of the preparations disclosed in Example 4, i.e. the increase in chain length of the fatty-acid residue in the phospholipid component increases the useful life of the echogenic agent in-vivo.

In the next Table below, there is shown the relative stability in the left ventricle of the rabbit of microbubbles (SF₆) prepared from

suspensions of a series of phospholipids whose fatty acid residues have different chain lengths (<injected dose: 1 ml/rabbit).

TABLE 6B

Phospho- lipid	Chain length (C _n)	PC (Torr)	ΔP (Torr)	Duration of contrast (sec)
DMPC	14	57	37	31
DPPC	16	100	76	105
DSPC	18	115	95	120
DAPC	20	266	190	>300

It has been mentioned hereinabove that for the measurement of resistance to pressure described in these Examples, a constant rate of pressure rise of 100 Torr/min was maintained. This is justified by the results given below which show the variations of the PC values for different gases in function to the rate of pressure increase. In these samples DMPC was the phospholipid used.

Gas sample	PC (Torr)		
	Rate of pressure increase (Torr/min)		
	40	100	200
SF ₆	51	57	82
Air	39	50	62
CH ₄	47	61	69
Xe	38	43	51
Freon 22	37	54	67

Example 7

A series of albumin microballoons as suspensions in water were prepared under air in a controlled sphere size fashion using the directions given in Example 1. Then the air in some of the samples was replaced by other gases by the gas-exchange sweep method at ambient pressure. Then, after diluting to 1:10 with distilled water as usual, the

samples were subjected to pressure testing as in Example 1. From the results gathered in Table 7 below, it can be seen that the two-steps preparation mode gives, in some cases, echo-generating agents with better resistance to pressure than the one-step preparation mode of Example 1.

TABLE 7

Sample No	Type of gas	Mw of the gas	Solubility in water	Initial bubble count (10 ⁸ /ml)	PC (Torr)
A14	Air	29	.0167	3.1	53
A18	Air	29	.0167	3.8	52
A18/SF ₆	SF ₆	146	.005	0.8	115
A18/C ₂ H ₆	C ₂ H ₆	30	.042	3.4	72
A19	Air	29	.0167	1.9	51
A19/SF ₆	SF ₆	146	.005	0.6	140
A19/Xe	Xe	131	.108	1.3	67
A22/CF ₄	CF ₄	88	.0038	1.0	167
A22/Kr	Kr	84	.059	0.6	85

Example 8

The method of the present invention was applied to an experiment as disclosed in the prior art, for instance Example 1 WO-92/11873. Three grams of Pluronic® F68 (a copolymer of polyoxyethylene-polyoxypropylene with a molecular weight of 8400), 1g of dipalmitoylphosphatidylglycerol (Na salt, AVANTI Polar Lipids) and 3.6 g of glycerol were added to 80 ml of distilled water. After heating at about 80°C, a clear homogenous solution was obtained. The tenside solution was cooled to room temperature and the volume was adjusted to 100 ml. In some experiments (see Table 8) dipalmitoylphosphatidylglycerol was replaced by a mixture of diarachidoylphosphatidylcholine (920 mg) and 80 mg of dipalmitoylphosphatidic acid (Na salt, AVANTI Polar lipids).

The bubble suspensions were obtained by using two syringes connected via a three-way valve. One of the syringes was filled with 5 ml of the tenside solution while the other was filled with 0.5 ml of air or gas. The three-way valve was filled with the tenside solution before it was connected to the gas-containing syringe. By alternatively operating the two pistons, the tenside solutions were transferred back and forth between the two syringes (5 times in each direction), milky suspensions were formed. After dilution (1:10 to 1:50) with distilled water saturated at equilibrium with air, the resistance to pressure of the preparations was determined according to Example 1. The pressure increase rate was 240 Torr/min. The following results were obtained:

TABLE 8

Phospholipid	Gas	Pc (mm Hg)	DP (mm Hg)
DPPG	air	28	17
DPPG	SF ₆	138	134
DAPC/DPPA 9/1	air	46	30
DAPC/DPPA 9/1	SF ₆	269	253

It follows that by using the method of the invention and replacing air with other gases e.g. SF₆ even with known preparations a considerable improvements i.e. increase in the resistance to pressure may be achieved. This is true both in the case of negatively charged phospholipids (e.g. DPPG) and in the case of mixtures of neutral and negatively charged phospholipids (DAPC/DPPA).

The above experiment further demonstrates that the recognised problem sensitivity of microbubbles and microballoons to collapse when exposed to pressure i.e. when suspensions are injected into living beings, has advantageously been solved by the method of the invention. Suspensions with microbubbles or microballoons with greater resistance against collapse and greater stability can advantageously be produced providing suspensions with better reproducibility and improved safety of echographic measurements performed in vivo on a human or animal body.

CLAIMS

1. A method for imparting resistance against collapsing to contrast agents for ultrasonic echography which consist of gas-filled microvesicles in suspension in aqueous liquid carrier phases, i.e. either microbubbles bounded by an evanescent gas/liquid interfacial closed surface, or microballoons bounded by a material envelope, said collapsing resulting, at least in part, from pressure increases effective e.g. when the said suspensions are injected into the bloodstream of patients, said method comprising forming said microvesicles in the presence of a gas, or if the microvesicles are already made filling them with this gas, which is a physiologically acceptable gas, or gas mixture, at least a fraction of which has a solubility in water expressed in liters of gas by liter of water under standard conditions divided by the square root of the molecular weight in daltons which does not exceed 0.003.

2. The method of claim 1, which is carried out in two steps, in the first step the microvesicles or dry precursors thereof are initially prepared under an atmosphere of a first gas, then in the second step at least a fraction of the first gas is substantially substituted by a second gas, the latter being said physiologically acceptable gas.

3. The method of claim 1, in which the physiologically acceptable gas used is selected from SF₆, SeF₆, Freon® such as CF₄, CBrF₃, C₄F₈, CClF₃, CCl₂F₂, C₂F₆, C₂ClF₅, CBrClF₂, C₂Cl₂F₄, CBr₂F₂ and C₄F₁₀.

4. The method of claim 2, in which the gas used in the first step is of a kind that allows effective control of the average size and concentration of the microvesicles in the carrier liquid, and the physiologically acceptable gas added in the second step ensures prolonged useful echogenic life to the suspension for in-vivo ultrasonic imaging.

5. The method of claim 1, in which the aqueous phase carrying the microbubbles contains dissolved film-forming surfactants in lamellar or laminar form, said surfactants stabilizing the microbubbles boundary at the gas to liquid interface.

6. The method of claim 5, in which said surfactants comprise one or more phospholipids.

7. The method of claim 6, in which at least part of the phospholipids are in the form of liposomes.

8. The method of claim 6, in which at least one of the phospholipids is a diacylphosphatidyl compound wherein the acyl group is a C₁₆ fatty acid residue or a higher homologue thereof.

9. The method of claims 1 and 2, in which the microballoon material envelope is made of an organic polymeric membrane.

10. The method of claim 9, in which the polymers of the membrane are selected from polylactic or polyglycolic acid and their copolymers, reticulated serum albumin, reticulated haemoglobin, polystyrene, and esters of polyglutamic and polyaspartic acids.

11. The method of claim 1, in which the forming of the microvesicles with said physiologically acceptable gas is effected by alternately subjecting dry precursors thereof to reduced pressure and restoring the pressure with said gas, and finally dispersing the precursors in a liquid carrier.

12. The method of claim 1, in which the filling of the microballoons with said physiologically acceptable gas is effected by simply flushing the suspension with said gas under ambient pressure.

13. The method of claim 1, which comprises making the microvesicles by any standard method known in the art but operating under an atmosphere composed at least in part of said gas.

14. Suspensions of gas filled microvesicles distributed in an aqueous carrier liquid to be used as contrast agents in ultrasonic echography, characterized in that the gas is physiologically acceptable and such that at least a portion thereof has a solubility in water, expressed in liter of gas by liter of water under standard conditions, divided by the square root of the molecular weight which does not exceed 0.003.

00003740 040606

15. The aqueous suspensions of claim 14, characterized in that the gas is such that the pressure difference ΔP between those pressures which, when applied under standard conditions and at a rate of about 100 Torr/min to the suspension cause the collapsing of about 75%, respectively 25%, of the microvesicles initially present, is at least 25 Torr.

16. Aqueous suspensions according to claim 14, in which the microvesicles are microbubbles filled with said physiologically acceptable gas suspended in an aqueous carrier liquid containing phospholipids whose fatty acid residues contain 16 carbons or more

17. Contrast agents for echography in precursor form consisting of a dry powder comprising lyophilized liposomes and stabilizers, this powder being dispersible in aqueous liquid carriers to form echogenic suspensions of gas-filled microbubbles, characterized in that it is stored under an atmosphere comprising a physiologically acceptable gas whose solubility in water, expressed in liter of gas by liter of water under standard conditions, divided by the square root of the molecular weight does not exceed 0.003.

18. The contrast agent precursors of claim 17, in which the liposomes comprise phospholipids whose fatty acid residues have 16 or more carbon atoms.

09003740 040000

ABSTRACT


LONG-LASTING AQUEOUS DISPERSIONS OR SUSPENSIONS OF
PRESSURE-RESISTANT GAS-FILLED MICROVESICLES AND METHODS
FOR THE PREPARATION THEREOF

One can impart outstanding resistance against collapse under pressure to gas-filled microvesicle used as contrast agents in ultrasonic echography by using as fillers gases whose solubility in water, expressed in liter of gas by liter of water under standard conditions, divided by the square root of the molecular weight does not exceed 0.003.

Fig. 1.

8607070725000

I/I

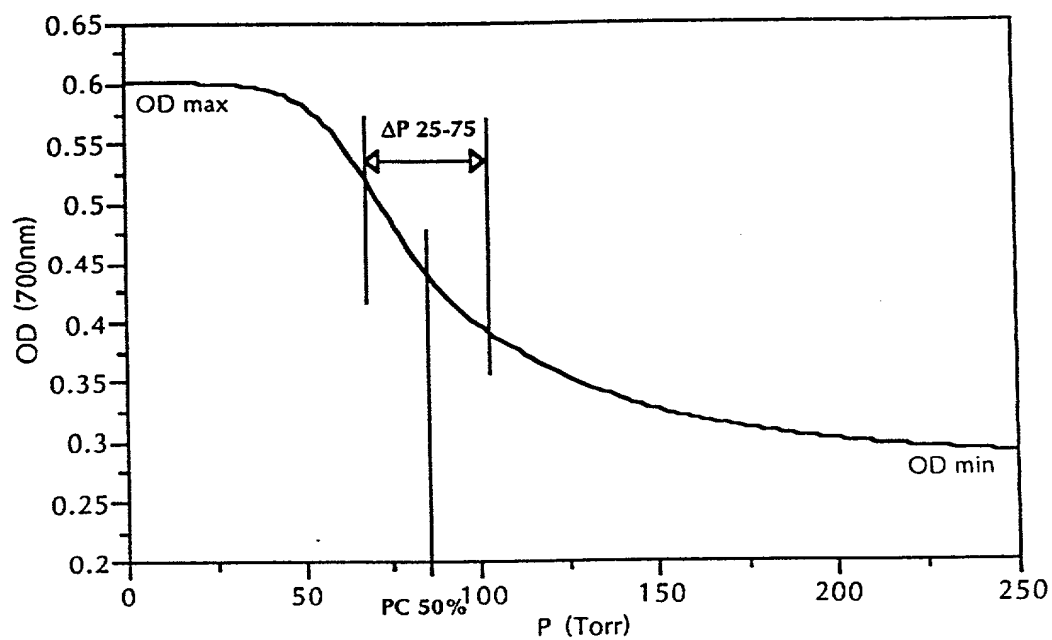Fig 1

Nixon & Vanderhye P.C. (6/92)

[] is attached hereto.
[X] was filed on December 16, 1992 as U.S. Application Serial No. 07/991,237
[] was filed as PCT international application No. PCT/_____/____ on _____
and (if applicable to U.S. or PCT application) was amended on _____

Application Number	Country	Day/Month/Year Filed
92810046.0	EUROPE	23 JAN 1992

Application Serial No.	Day/Month/Year Filed	Status: patented, pending, abandoned
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

And I hereby appoint NIXON & VANDERHYE P.C., 1100 North Glebe Road, 8th Floor, Arlington, Virginia 22201-4714, telephone number (703) 816-4000 (to whom all communications are to be directed), and the following attorneys thereof (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent: Arthur R. Crawford, 25327; Larry S. Nixon, 25640; Robert A. Vanderhye, 27076; James T. Hosmer, 30184; Robert W. Faris, 31352; Richard G. Besha, 22770; Mark E. Nusbaum, 32348; Michael J. Keenan, 32106; Bryan H. Davidson, 30251; Stanley C. Spooner, 27393; Leonard C. Mitchard, 29009; Duane M. Byers, 33363; Paul J. Henon, 33626; Jeffrey H. Nelson, 30481; John R. Lustova, 33149; H. Warren Burnam, Jr., 29366; Thomas E. Byrne, 32203.

Inventor's Name (typed)	Michel	SCHNEIDER	French
	First	Middle Initial	Family Name
			Citizenship

Post Office Address Domaine du Moulin, 34 route d'Annecy Zip Code 1256

Inventor's Name (typed)		Feng	YAN
First	Middle Initial	Family Name	Citizenship

Residence (City) Genève (State/Foreign Country) Switzerland

st Office Address 52, rue de la Prulay Zip Code 1202

Inventor's Name (typed) <u>Pascal</u> <u>GRENIER (legal heir : Nadine GARCEL)</u>			
First	Middle Initial	Family Name	Citizenship

Residence (City) Ambilly (State/Foreign Country) France

Post Office Address 10 bis, rue du Pont Noir Zip Code 74100

FOR ADDITIONAL INVENTORS, check box ☒ and attach sheet with same information and signature and date for each.

Nixon & Vanderhye P.C. (6/92)

the specification of which (check applicable box(es)):

[] is attached hereto.

[X] was filed on December 16, 1992 as U.S. Application Serial No. 07/991,237

[] was filed as PCT international application No. PCT/_____/_____ on _____
and (if applicable to U.S. or PCT application) was amended on _____

Prior Foreign Application(s):

Application Number	Country	Day/Month/Year Filed
92810046.0	EUROPE	23 JAN 1992

I hereby claim the benefit under 35 U.S.C. 120 365 of all prior United States and PCT international applications listed above or below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior applications in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56(a) which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s):

Application Serial No.	Day/Month/Year Filed	Status: patented, pending, abandoned
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint NIXON & VANDERHYE P.C., 1100 North Glebe Road, 8th Floor, Arlington, Virginia 22201-4714, telephone number (703) 816-4000 (to whom all communications are to be directed), and the following attorneys thereof (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent: Arthur R. Crawford, 25327; Larry S. Nixon, 25640; Robert A. Vanderhye, 27076; James T. Hosmer, 30184; Robert W. Faris, 31352; Richard G. Besha, 22770; Mark E. Nusbaum, 32348; Michael J. Keenan, 32106; Bryan H. Davidson, 30251; Stanley C. Spooner, 27393; Leonard C. Mitchard, 29009; Duane M. Byers, 33363; Paul J. Henon, 33626; Jeffry H. Nelson, 30481; John R. Lastova, 33149; H. Warren Burnam, Jr., 29366; Thomas E. Byrne, 32205.

1) Inventor's Signature James K. Kucinski Date 12 February, 1993

Inventor's Name (typed)	Jérôme	S	PUGINIER	French
	First	Middle Initial	Family Name	Citizenship

Residence (City) Le Châble-Beaumont (State/Foreign Country) France

Post Office Address Place de l'Ancienne Mairie Zip Code 74160

2) Inventor's Signature Marie Bernadette Barron Date 12 February, 1993

Inventor's Name (typed)	<u>Marie-Bernadette</u>			<u>BARRAU</u>	<u>French</u>
	First	Middle Initial		Family Name	Citizenship

Residence (City) Geneva (State/Foreign Country) Switzerland

Office Address 7, rue des Sources Zip Code 1207

2. Inventor's Signature _____ Date _____

Inventor's Name (typed)			
First	Middle Initial	Family Name	Citizenship

Residence (City) _____ (State/Foreign Country) _____

Post Office Address _____ Zip Code _____

FOR ADDITIONAL INVENTORS, check box [] and attach sheet with same information and signature and date for each.